


## High voltage NPN Darlington transistor for ignition coil



### Features


- High voltage special Darlington structure
- Very rugged Bipolar technology
- High DC current gain

### Application

- High ruggedness electronic ignition for small engines

### Description

The device is a high voltage NPN transistor in monolithic special Darlington configuration, designed for applications such as electronic ignition for small engines (scooters, lawnmowers, chainsaws).

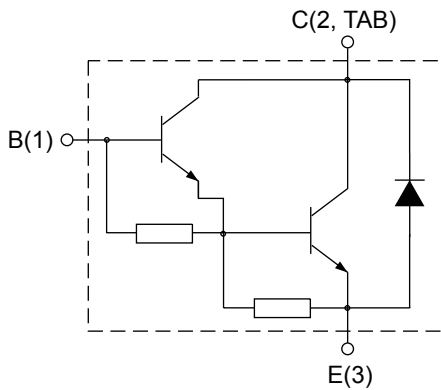

B1C2TABE3



#### Product status links

[ST901T](#)
[STD901T](#)

#### Product summary

Order code	ST901T
Marking	901T
Package	TO-220
Packing	Tube
Order code	STD901T
Marking	D901T
Package	DPAK
Packing	Tape and reel

# 1 Electrical ratings

**Table 1. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{CES}$	Collector-emitter voltage ( $V_{BE} = 0$ )	500	V
$V_{CEO}$	Collector-emitter voltage ( $I_B = 0$ )	350	V
$V_{EBO}$	Emitter-base voltage ( $I_C = 0$ )	5	V
$I_C$	Collector current	4	A
$I_{CM}$	Collector peak current ( $t_p < 5$ ms)	8	A
$I_B$	Base current	0.5	A
$I_{BM}$	Base peak current ( $t_p < 5$ ms)	2.5	A
$P_{TOT}$	Total power dissipation at $T_C = 25$ °C for ST901T	100	W
	Total power dissipation at $T_C = 25$ °C for STD901T	35	
$T_{stg}$	Operating junction temperature range	-65 to 150	°C
$T_J$	Storage temperature range		°C

**Table 2. Thermal data**

Symbol	Parameter	Value	Unit
$R_{thJC}$	Thermal resistance, junction-to-case for ST901T	1.25	°C/W
	Thermal resistance, junction-to-case for STD901T	3.57	

## 2 Electrical characteristics

$T_C = 25\text{ °C}$  unless otherwise specified.

**Table 3. Electrical characteristics**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{CES}$	Collector cut-off current	$V_{BE} = 0\text{ V}, V_{CE} = 500\text{ V}$			100	$\mu\text{A}$
		$V_{BE} = 0\text{ V}, V_{CE} = 500\text{ V}, T_C = 125\text{ °C}$ <sup>(1)</sup>			500	
$I_{CEO}$	Collector cut-off current	$I_B = 0\text{ A}, V_{CE} = 350\text{ V}$			100	$\mu\text{A}$
		$I_B = 0\text{ A}, V_{CE} = 350\text{ V}, T_C = 125\text{ °C}$ <sup>(1)</sup>			500	
$I_{EBO}$	Emitter cut-off current	$I_C = 0\text{ A}, V_{EB} = 5\text{ V}$			10	$\mu\text{A}$
$V_{CEO(sus)}$ <sup>(2)</sup>	Collector-emitter sustaining voltage	$I_B = 0\text{ A}, I_C = 10\text{ mA}$	350			V
$V_{CE(sat)}$ <sup>(2)</sup>	Collector-emitter saturation voltage	$I_C = 2\text{ A}, I_B = 20\text{ mA}$			2	V
$V_{BE(sat)}$ <sup>(2)</sup>	Base-emitter saturation voltage	$I_C = 2\text{ A}, I_B = 20\text{ mA}$			1.8	V
$h_{FE}$	DC current gain	$I_C = 2\text{ A}, V_{CE} = 2\text{ V}$	1800		3800	
		$I_C = 4\text{ A}, V_{CE} = 2\text{ V}$	500			
	Functional test	$V_{CC} = 24\text{ V}, L = 4\text{ mH}, V_{clamp} = 350\text{ V}$	4			A
$t_s$	Storage time	$V_{CC} = 12\text{ V}, L = 4\text{ mH}, I_C = 2\text{ A},$		15		$\mu\text{s}$
$t_f$	Fall time	$V_{clamp} = 250\text{ V}, I_{B(on)} = 20\text{ mA}, V_{BE(off)} = -3\text{ V}$		1.5		$\mu\text{s}$

1. Specified by design, not tested in production.

2. Pulse test: pulse duration  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .

## 2.1 Electrical characteristics (curves)

Figure 1. Collector-emitter saturation voltage ( $h_{FE} = 100$ )

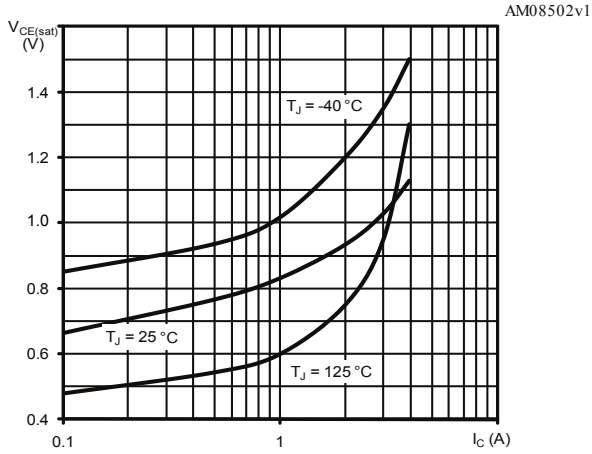


Figure 2. Base-emitter saturation voltage ( $h_{FE} = 100$ )

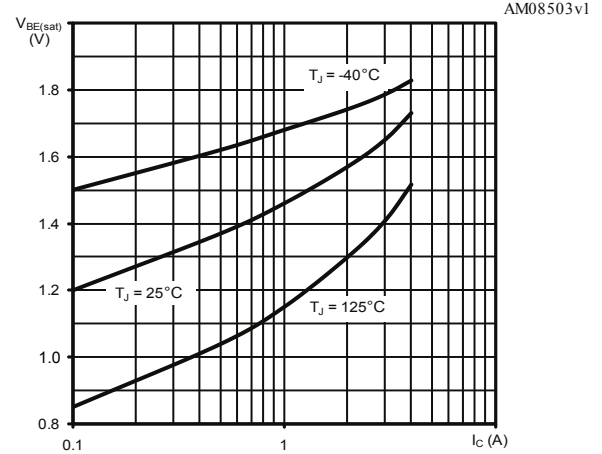


Figure 3. DC current gain ( $V_{CE} = 2\text{ V}$ )


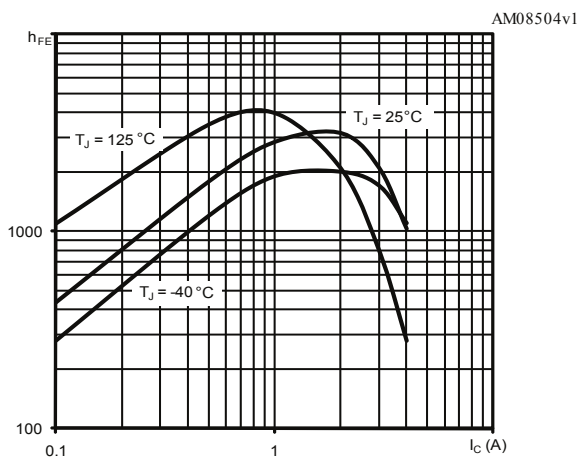


Figure 4. DC current gain ( $V_{CE} = 5\text{ V}$ )

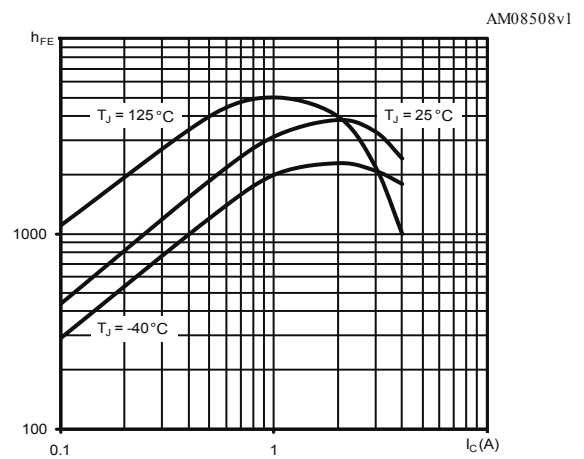


### 3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

#### 3.1 TO-220 type A package information

Figure 5. TO-220 type A package outline

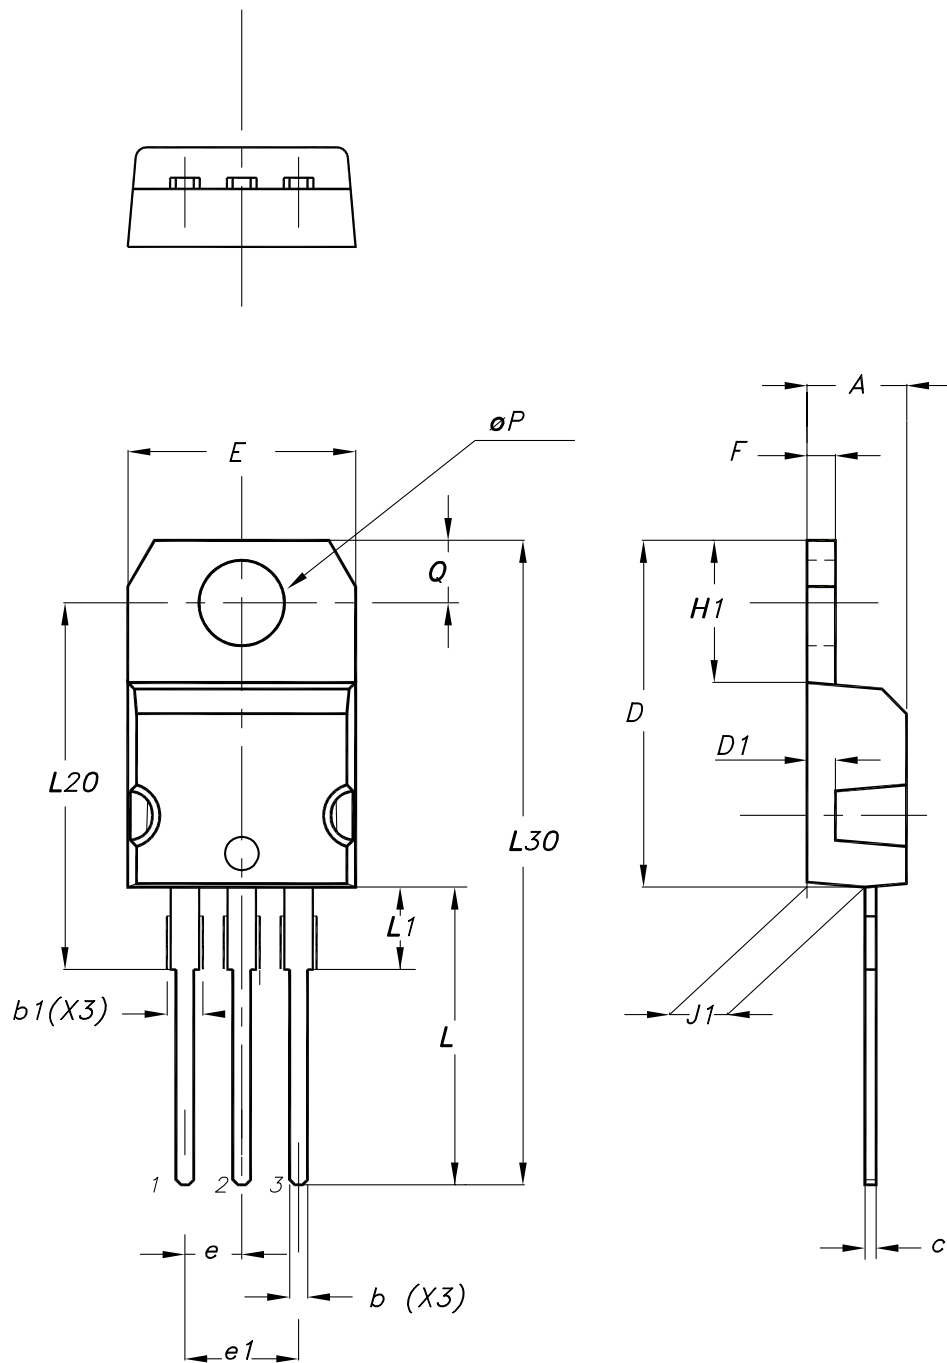


0015988\_typeA\_Rev\_23

**Table 4. TO-220 type A package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
b	0.61		0.88
b1	1.14		1.55
c	0.48		0.70
D	15.25		15.75
D1		1.27	
E	10.00		10.40
e	2.40		2.70
e1	4.95		5.15
F	1.23		1.32
H1	6.20		6.60
J1	2.40		2.72
L	13.00		14.00
L1	3.50		3.93
L20		16.40	
L30		28.90	
øP	3.75		3.85
Q	2.65		2.95
Slug flatness		0.03	0.10

### 3.2 DPAK (TO-252) type A package information

Figure 6. DPAK (TO-252) type A package outline

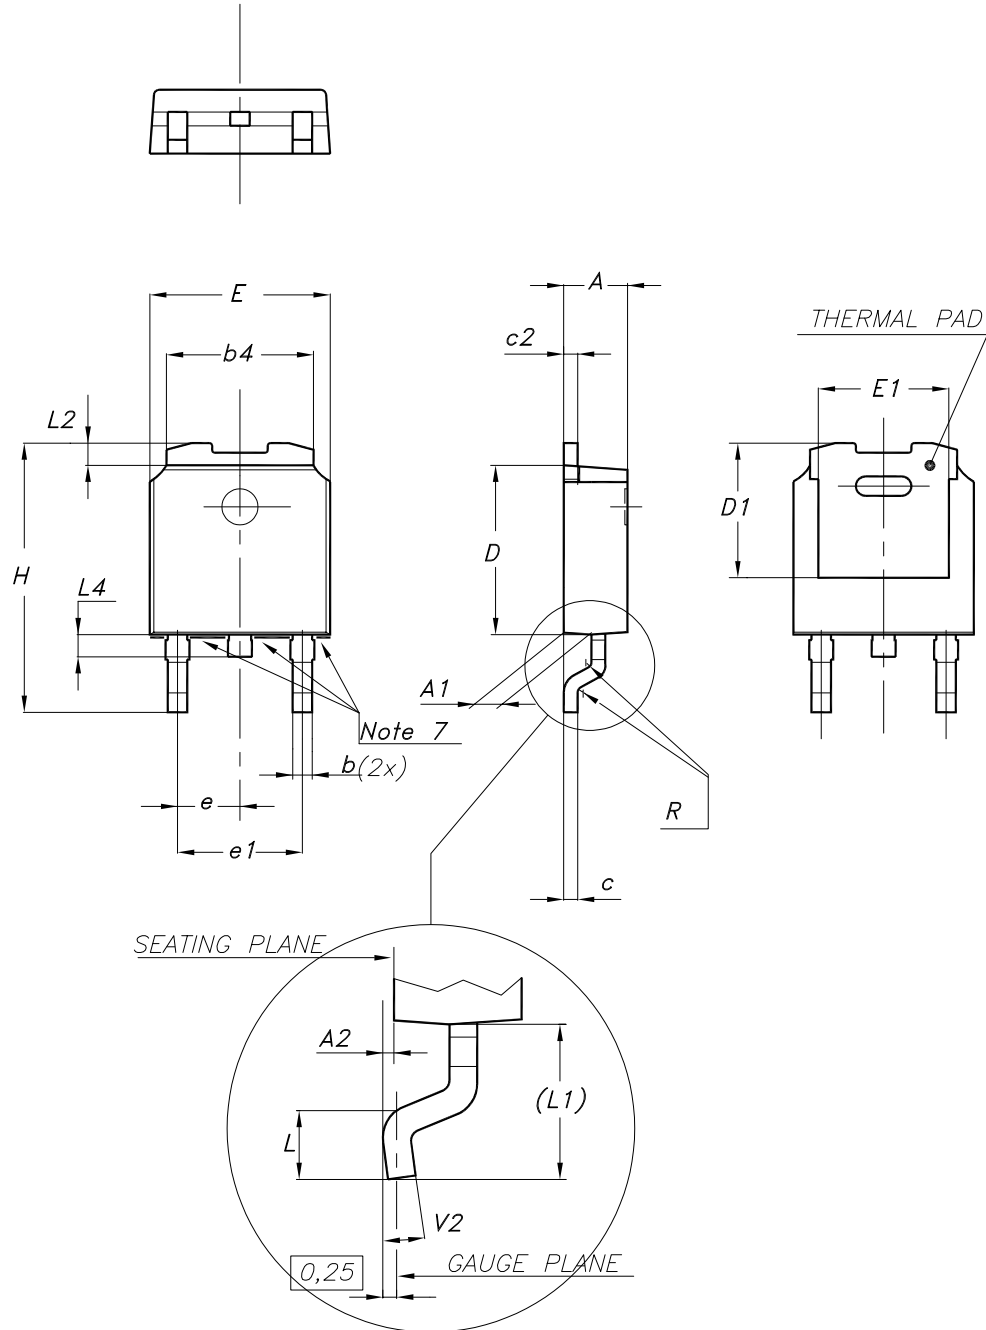

0068772\_A\_34


**Table 5. DPAK (TO-252) type A mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	2.20		2.40
A1	0.90		1.10
A2	0.03		0.23
b	0.64		0.90
b4	5.20		5.40
c	0.45		0.60
c2	0.48		0.60
D	6.00		6.20
D1	4.95	5.10	5.25
E	6.40		6.60
E1	4.60	4.70	4.80
e	2.159	2.286	2.413
e1	4.445	4.572	4.699
H	9.35		10.10
L	1.00		1.50
(L1)	2.60	2.80	3.00
L2	0.65	0.80	0.95
L4	0.60		1.00
R		0.20	
V2	0°		8°



### 3.3 DPAK (TO-252) type C3 package information

Figure 7. DPAK (TO-252) type C3 package outline

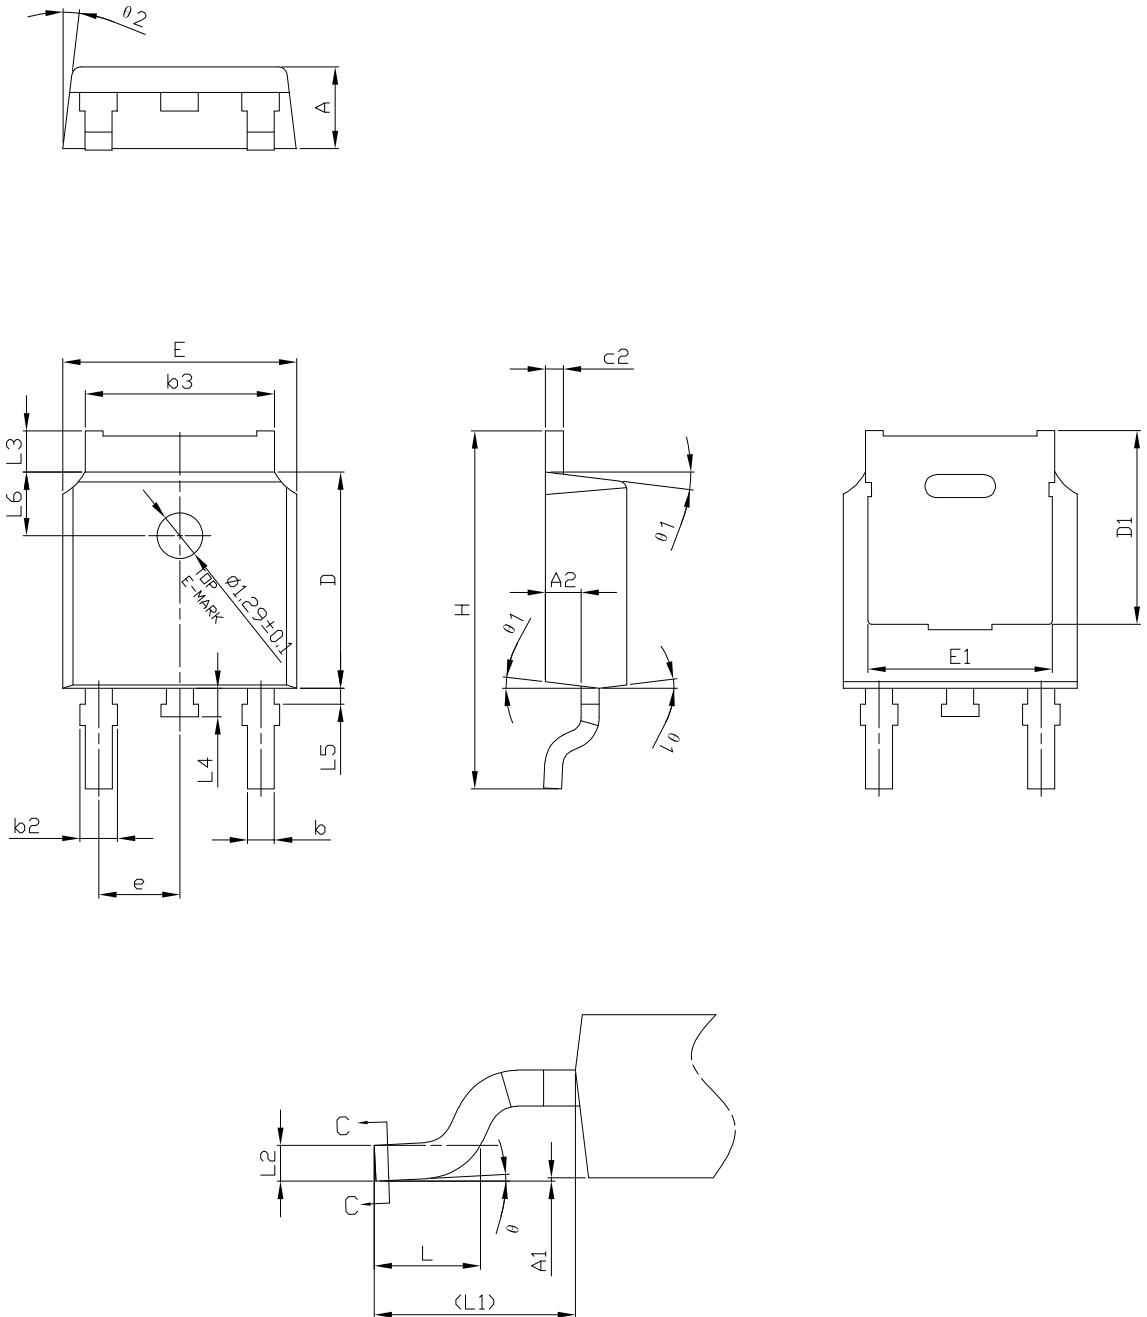


0068772\_type-C3\_rev34

**Table 6. DPAK (TO-252) type C3 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	2.20	2.30	2.38
A1	0.00		0.10
A2	0.90	1.01	1.10
b	0.72		0.85
b2	0.72		1.10
b3	5.13	5.33	5.46
c	0.47		0.60
c2	0.47		0.60
D	6.00	6.10	6.20
D1	5.20	5.45	5.70
E	6.50	6.60	6.70
E1	5.00	5.20	5.40
e	2.186	2.286	2.386
H	9.80	10.10	10.40
L	1.40	1.50	1.70
L1	2.90 REF		
L2	0.51 BSC		
L3	0.90		1.25
L4	0.60	0.80	1.00
L5	0.15		0.75
L6	1.80 REF		
θ	0°		8°
θ1	5°	7°	9°
θ2	5°	7°	9°

Figure 8. DPAK (TO-252) recommended footprint (dimensions are in mm)

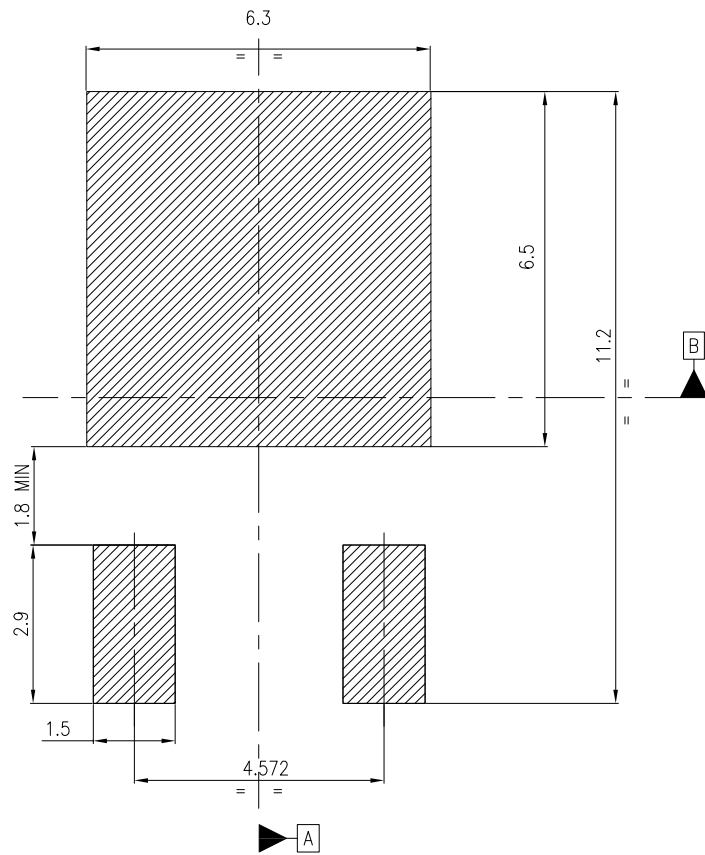

Notes:

- 1) This footprint is able to ensure insulation up to 630 Vrms (according to CEI IEC 664-1)
- 2) The device must be positioned within  $\boxed{\oplus 0.05 \text{ A B}}$

FP\_0068772\_34

## Revision history

**Table 7. Document revision history**

Date	Version	Changes
14-Oct-2004	1	First release.
15-Jan-2005	2	DC current gain range has been modified.
25-Feb-2005	3	Added four drawings on page 3.
13-Oct-2005	4	Updated package mechanical data
11-Feb-2011	5	Inserted new order code STD901T
18-May-2023	6	Updated Section 3.1 TO-220 type A package information and Section 3.2 DPAK (TO-252) type A package information. Added Section 3.3 DPAK (TO-252) type C3 package information. Minor text changes.

---

## Contents

<b>1</b>	<b>Electrical ratings</b> .....	<b>2</b>
<b>2</b>	<b>Electrical characteristics</b> .....	<b>3</b>
<b>2.1</b>	Electrical characteristics (curves) .....	<b>4</b>
<b>3</b>	<b>Package information</b> .....	<b>5</b>
<b>3.1</b>	TO-220 type A package information .....	<b>5</b>
<b>3.2</b>	DPAK (TO-252) type A package information .....	<b>7</b>
<b>3.3</b>	DPAK (TO-252) type C3 package information .....	<b>9</b>
	<b>Revision history</b> .....	<b>12</b>

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved